



The EPCL series is designed to fit where no other recessed fixture can due to its IC rating and air tight construction; no can housing is needed. At only 1.75-2.25" thick, this fixture is ideal for ceilings with limited space. Installation is as simple as cutting your hole, and snapping the fixture into place using the attached spring clips. This ultra thin wafer gimbal LED delivers 650 lumens (3") and 1000 lumens (4") of light in Kelvin selectable 3K , 4K & 5K

WARRANTY / LISTING

- * ETL Listed for damp locations in US & Canada (new construction & retrofit)
- * IC rated for direct contact with insulation
- * Energy Star certified
- * Passes FCC Class A
- * Five year warranty on all electronics and housing

FEATURES

- * 360° directional rotatable and 45° tilt
- * Type IC Rated: No Housing Required
- * Air Tight: Suitable for Damp Locations
- * Junction Box Complies to ETL Safety Standard
- * High Lumens Output
- * Triac Dimmable
- * Easy Installation (labor cost saving)
- * Applications: Recessed
- * Color Temperature: Kelvin selectable 3K, 4K, 5K
- * CRI: >80
- * Beam Angel: 24° / 38°
- * Input: AC90~130V
- * Power Factor: 0.9
- * Lifetime: 50,000 hours
- * Compatible dimmers: Lutron, Legrand, Leviton
- * Led Type: COB

DIMENSIONS




	DIMENSION 3"	DIMENSION 4"
Outer Diameter of light	83 mm – 3.25"	128 mm – 5"
Cut Hole of Light	65 mm – 2.55"	115 mm – 4.5"
Height of Light	45 mm – 1.77"	58 mm – 2.25"
Length of Junction Box	59 mm – 2.32"	100 mm – 4"
Width of Junction Box	82.5 mm – 3.25"	68 mm – 2.68"
Height of Junction Box	37.5 mm – 1.50"	35 mm – 1.38"

ORDERING INFORMATION

PART #	Size	KELVIN	LUMENS	ENERGY USED	HALOGEN EQUIVALENT
EPCL-8X-ETL-COB	3" Gimbal	3K,4K,5K	650	8W	80W
EPCL-15X-ETL-COB	4" Gimbal	3K,4K,5K	1000	15W	100W



PHOTOMETRIC DATA 3''

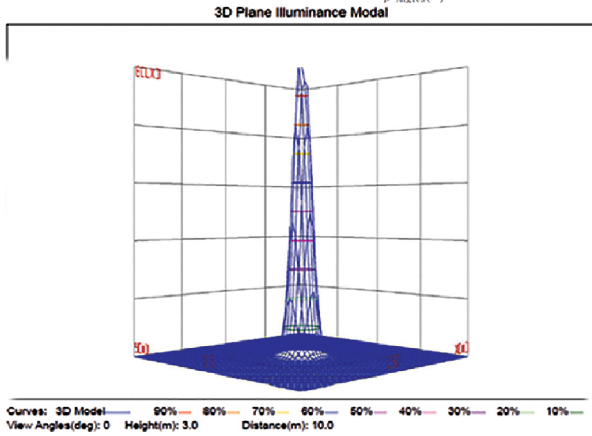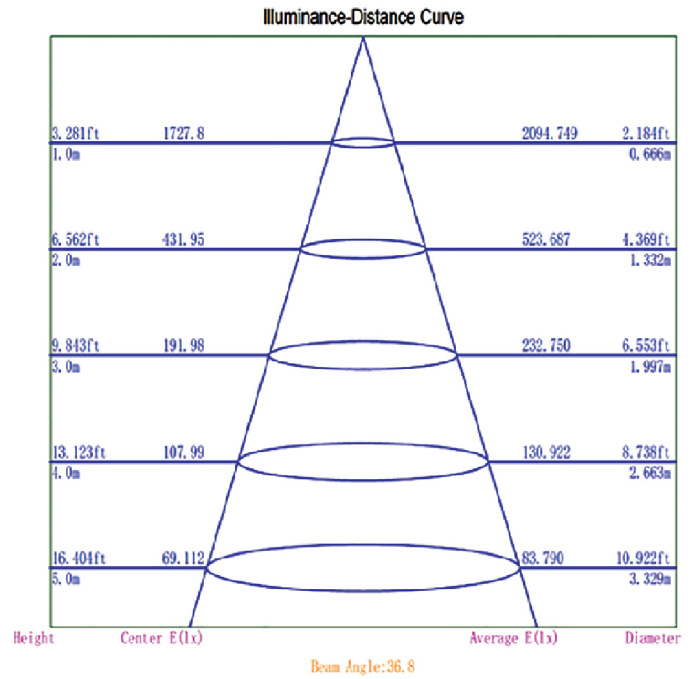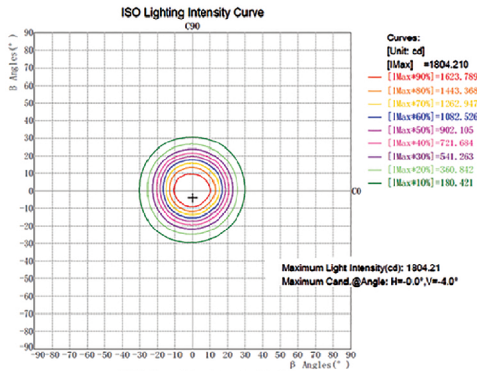

PHOTOMETRIC DATA 4''

