




This Landscape spot light series is an ideal solution for general site, landscape, sign and pathway lighting. Constructed of a die cast aluminum housing, and a polycarbonate lens with seamless silicone gasket to prevent leaks, it will stand up to many years of punishing environmental conditions. This flood light is 15W/20W/25W wattage selectable and 3K/4K/5K Kelvin selectable.

FEATURES


- * Color temperature: 3000K, 4000K, 5000K selectable
- * Wattage selectable: 15 / 20 / 25W
- * Lumens per watt: 120 Lm -3000 lumens @25W
- * Long-life LEDs provide 50,000 hours of operation with at least 70% of initial lumen output (L70)
- * Universal 100-277 VAC input
- * 0-10V dimming standard
- * Power factor > 0.90
- * Color rendering index > 80
- * Die cast aluminum housing with durable, Dark bronze powder coat paint.
- * Polycarbonate lens
- * Beam Angle : 40 degrees
- * Operating temperature: -40F - 113 F

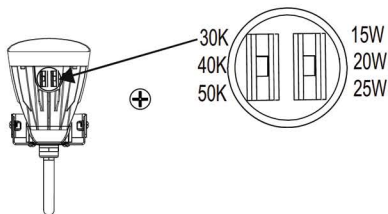

WARRANTY & DETAILS

- * DLC Premium listed
- * ETL Listed
- * Waterproof rating: Wet location
- * 5-year warranty on all electronics and housing

DIMENSIONS

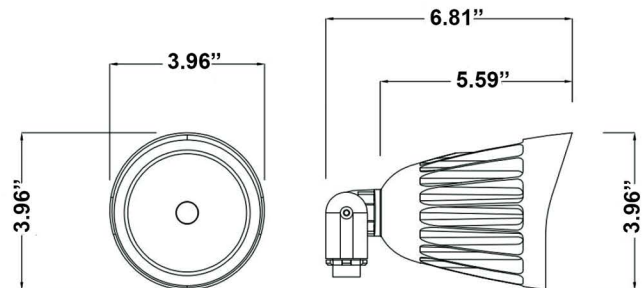

MOUNTING OPTIONS

- * Threaded pipe (NPT 1/2"), which attaches to a junction box, is standard
- * Optional spike-mount (ALS-LND-SPIKE) for ground mounting
- * Optional canopy-mount (FL17-CPYPLATE) for attachment to flat surface. Enclosure is sealed with a water-tight, silicon rubber gasket

ORDERING INFORMATION

PART #	Kelvin selectable	Wattage selectable	Lumens	Lumens
TS-BFL0125-25W-H-TCP	30K, 40K, 50K	15,20,25	3,000	120



PHOTOMETRIC DATA

