



The CLL-RWP01B Series is a rugged, durable LED Wall Pack that provides full adjustability of the LED modules. Light can be focused up, down, or anything in between. It is perfect for outdoor perimeter and area lighting. With a die cast aluminum housing and a polycarbonate lens, the CLL-RWP01B Series will stand up to many years of harsh environmental conditions. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional MH / HID Wall Packs


FEATURES


- * Color temperatures 3K, 4K & 5K selectable
- * 25W and 60W available
- * Seoul chips SMD3030
- * NO UV or IR in the beam
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Beam angle: 60 degree
- * Power factor > 0.90
- * 0-10V dimming capability standard
- * Total harmonic distortion < 20%
- * Color rendering index > 80
- * Die cast aluminum housing with durable, dark bronze powder coat finish
- Easy installation in new construction or retrofit applications


WARRANTY & DETAILS


- * DLC Premium
- * cULus listed for wet locations in ambient temperatures from (-40F to 113°F)
- * IP65 rated for ingress protection
- * Complies with FCC Part 15, class A
- * 5-year warranty on all electronics and housing

DIMENSIONS









ORDERING INFORMATION

PART #	CCT Color	Wattage	Lumens			Lumens per Watt		
	Temp		30K	40K	50K	30K	40K	50K
AST-RWP01B-25WHICYTDA1-BR-30/40/50	30K, 40K, 50K	25	3,175	3,675	3,325	127	145	133
AST-RWP01B-60WHICYTDA1-BR-30/40/50	30K, 40K, 50K	60	7,500	8,580	7,860	125	143	131














PHOTOMETRIC DATA


25W WALLPACK

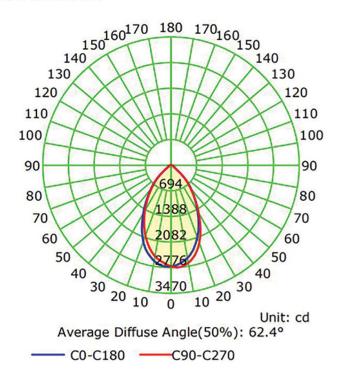

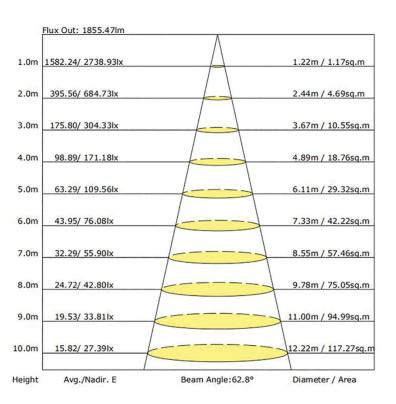

60W WALLPACK

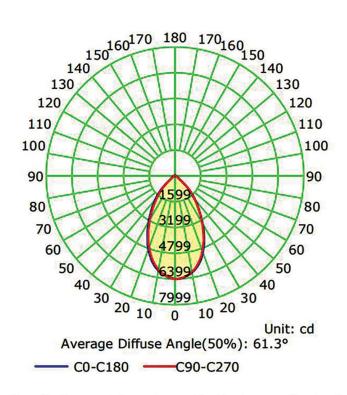

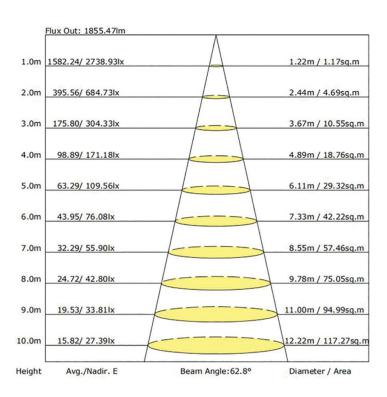

Specifications and dimensions subject to change without notice **PRO SOURCE LED LLC** - 1400 E. I-30 Rockwall, TX 75087 - sales@prosourceled.com - 214-234-8852 - prosourceled.com