




WARRANTY & DETAILS

- * Tested in accordance with IESNA LM79 & LM 80.
- * ETL Listed for **wet locations**, US & Canada
- * IC rated for direct contact with insulation (new construction & retrofit).
- * Energy Star certified
- * Five year warranty on all electronics and housing.

DIMENSIONS

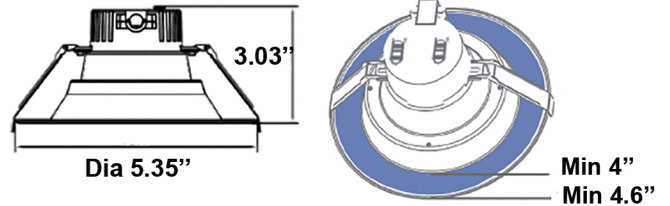

The 4", 6" and 8" Architectural Recessed Downlight Retrofit solution has an integrated LED power supply and thermal management system combined in a single compact unit designed to fit most standard 4", 6" and 8" openings. Also works in new construction applications. It is wattage and kelvin selectable to fit most needs and wet location rated.

MOUNTING


- * The adjustable housing clips allow for installation in a large range of commercial and architectural housings. These spring-action clips push up easily and fit securely for both retrofit and new construction installations.
- * Optional Frame-in Kit available

HOUSING

- * Compatible w/ most architectural housings or frames
- * Universal Housing Compatibility
- * Durable thermoplastic and aluminum construction

FEATURES

- * Long life LED's with up to 50,000 hours at 70% lumen maintenance
- * Universal 100-277 V AC (50-60 Hz) input standard
- * Dimmable w/ 0-10V
- * Save 75% compared to incandescent sources
- * High efficiency driver with a power factor >0.90
- * Built-in LED Driver
- * Operation temperature of -4 F - 104 F



- * CCT: 27K, 3K, 35K, 4K & 5K color temperature on all 3 lights
- * Wattage selectable :
- 4": 600 Lm to 1050 Lm
- 6": 800 Lm to 1850 Lm
- 8": 1000 Lm to 2400 Lm

ORDERING INFORMATION

	PART #	PART #	PART #
	D844-CCT-90-DM-WH-S	D846-CCT-90-DM-WH-S	D848-CCT-90-DM-WH-S
POWER	7W, 10W,13W	10W, 15W, 22W	12W,20W,30W
LUMENS	800W, 850W, 1050W	800W,1200W, 1850W	1000W, 1700W, 2400W
KELVIN RATING	2700K, 3000K, 3500K, 4000K, 5000K	2700K, 3000K, 3500K, 4000K, 5000K	2700K, 3000K, 3500K, 4000K, 5000K
DIMENSIONS	A	3.03"	3.98"
	B	Diameter 5.35"	Diameter 8.23"
	C	Minimum 4"	Minimum 6"
	D	Minimum 4.6"	Minimum 7.5"

Specifications and dimensions subject to change without notice
PRO SOURCE LED LLC - 1400 E. I-30 Rockwall, TX 75087 -
 sales@prosourceled.com - 9214-234-8852 - prosourceled.com

