




This wattage and Kelvin selectable full cutoff adjustable wall pack is a contemporary, commercial grade area light fixture. It features a heavy-duty, spring-loaded hinge. This light has a durable die cast aluminum housing and a polycarbonate lens. This fixture is standard with photocell installed. Its housing serves as a junction box for easy install and wiring.

**FEATURES**

- \* CCT selectable in 3000K, 4000K, 5000K
- \* Wattage selectable 45W, 60W, 75W
- \* Long-life LEDs provide 50,000 hours of operation
- \* Lumens: 120 Lu/W
- \* 0-10V dimming capability
- \* Heavy-duty, spring-loaded hinge
- \* Universal 120-277 AC voltage (50-60Hz) is standard
- \* Power factor > 0.90
- \* Beam angle: 65 x 95 degrees
- \* Color rendering index > 80
- \* Die cast aluminum housing with durable, dark bronze, powder coat paint. better cooling, light design
- \* Tough, UV-resistant polycarbonate lens
- \* Photocell control standard (easily bypassed if not required)

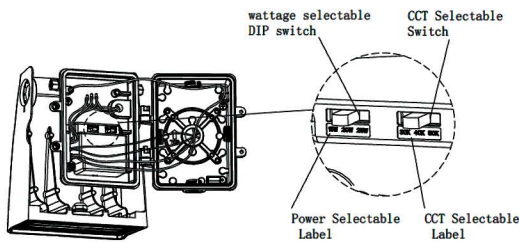


**WARRANTY & DETAILS**


- \* DLC Premium listed
- \* ETL Listed
- \* Waterproof rating: Wet location
- \* 5-year warranty on all electronics and housing

**VERTICAL ADJUSTABILITY**

- \* Heavy-duty, spring-loaded hinge provides vertical adjustability of the light housing
- \* Adjustability provides for a range of lighting effects from full-cutoff downlight to forward throw
- \* Knurled notches securely retain rotated position even in demanding environments



**DIMENSIONS**

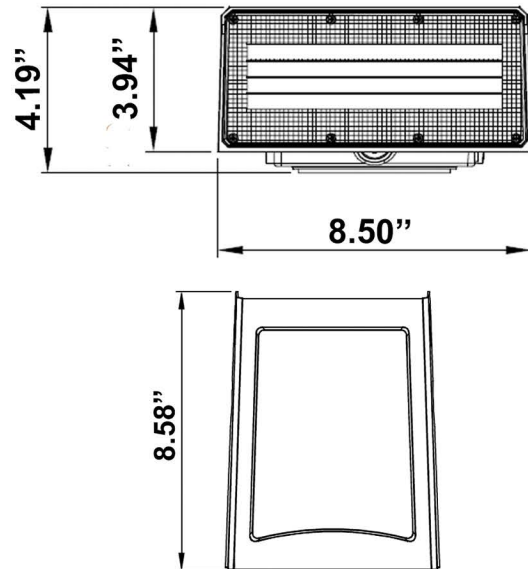

**ORDERING INFORMATION**

PART #	Kelvin selectable	Lumens	Lumen/watt	Wattage selectable
TS-WPD0608-45W/60W/75W-H-TCP(PT)	3K, 4K, 5K	9000 @ 75W	120	45/60/75

Specifications and dimensions subject to change without notice  
**PRO SOURCE LED LLC** - 1400 E. I-30 Rockwall, TX 75087 -  
 sales@prosourceled.com - 214-234-8852 - prosourceled.com



PHTOMETRIC DATA

