

Bilda BLD-HM08D-8W  
Emergency backup installed in 2x4

These 2x2 and 2x4 Back-Lit LED panels are designed to deliver general ambient lighting in a variety of indoor settings including schools, offices, hospitals, stores, and are the perfect choice for both new construction and retrofits. This high-efficacy fixture is 5 CCT and power tunable as well as standard 0-10 V dimmable.


**FEATURES**

- \* CCT: Color temperature selectable 27K, 35K, 4K, 5K, 60K
- \* Adjustable power: 20W, . 25W 30W, 35W, 40W for 2x2 panel
- \* Adjustable power: 30W, 40W, 50W, 60W,72W for 2x4 panel
- \* 130 Lumens per watt
- \* Lumens: 2x2 : 2600 - 5200 LU - 2x4 : 3900 - 9360 LU
- \* Long-life LEDs provide 50,000 hours of operation with at least 70% of initial lumen output (L70)
- \* Universal 100-277 AC voltage (50-60Hz) is standard
- \* 0-10 V dimming capability is standard
- \* Power factor > 0.90 and CRI > 80
- \* Viewing angle: 120 degrees
- \* Easy installation in new construction or retrofit
- \* Standard earthquake clips provide secure installation in grid ceilings
- \* Standard mounting using recessed mounting in grid ceilings. Surface mount kit SMKT-22 and SMKT-24 sold separately. Also sold separately is a 6 x 2 ft cable suspension kit SK6
- \* Pre-installed Bilda BLD-HM08D-8W emergency backup driver on 2 x 4 panel BPL24-3072W-2760-H1-EM

**WARRANTY / LISTING**

- \* ETL listed
- \* DLC standard listed
- \* Suitable for temperatures from (-4°F to 140°F)
- \* 5 year warranty

**DIMENSIONS**

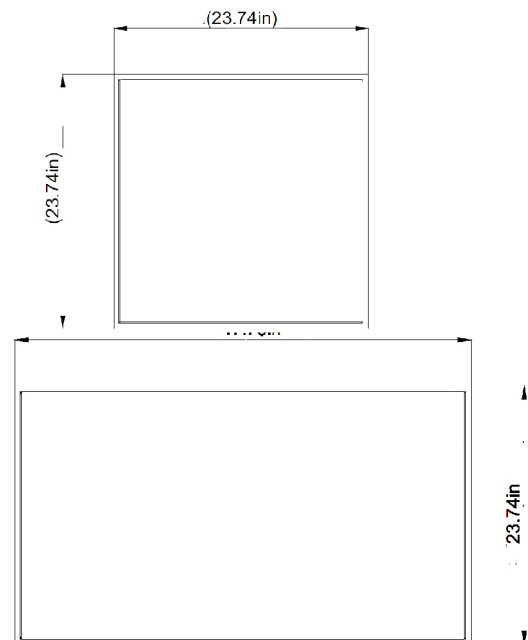

**ORDERING INFORMATION**

PART #	LUMENS	WATTAGE SELECTABLE	CCT TUNABLE	ACCESSORIES (order separately)
2x2 BPL22-2040W-2760-H1	2600 – 5200	20,25,30,35,40w	27K,35K, 4K, 5K, 60K	Surface Mounting kit and suspension Kits available
2x4 BPL24-3072W-2760-H1	3900 – 9360	30,40,50,60,72w	27K,35K, 4K, 5K, 60K	
2x4 BPL24-3072W-2760-H1 -EM	3900 – 9360	30,40,50,60,72w	27K,35K, 4K, 5K, 60K	<b>BILDA HM08D-8W emergency backup installed</b>

