



The VP-XF-CCT is a surface-mounted LED light available in 2ft, 4ft and 8ft, designed to prevent the intrusion of moisture and dust. It provides general ambient lighting in commercial and industrial settings, and is the perfect choice for both new construction and retrofits. This high-efficacy light provides long-life and uniform illumination. Input voltage 120-277V models. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattage (2ft, 20W,25W,30W), (4ft, 30W, 40W, 50W) or (8ft, 50W, 60W, 70W).

FEATURES

- * Color temperature : Tunable CCT 35K, 4K and 5K
- * Wattage selectable 2 ft: 20W, 25W and 30W
- * Wattage selectable 4 ft: 30W, 40W and 50W
- * Wattage selectable 8 ft: 50W, 60W and 70W
- * Lumens per watt: 140 Lm/W
- * Lumens 2 ft: 2872 (30W), 3400 (40W), 4021 (50W)
- * Lumens 4 ft: 4200 (30W), 5600 (40W), 7000 (50W)
- * Lumens 8 ft: 7000 (50W), 8400 (60W), 9800 (70W)
- * Long-life LEDs provide 100,000 hours of operation
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Suitable for wet locations. IP 66 rated
- * Power factor > 0.90
- * Beam Angle: 120 degrees
- * Color rendering index > 80
- * Working temperature: -4 F +113 F
- * Anti-UV frosted prismatic polycarbonate lens

ORDERING INFORMATION


MODEL	Color Temp	Lumens	Lumen/watt	Wattage
VP-2F-30W-CCT	CCT: 35K, 4K,5K	2672, 3400, 4021	140	20,25,30W
VP-4F-50W-CCT	CCT: 35K, 4K,5K	4200, 5600, 7000	140	30,40,50W
VP-8F-70W-CCT	CCT: 35K, 4K,5K	7000, 8400, 9800	140	50,60,70W

WARRANTY & DETAILS

- * ETL Listed
- * FCC class A
- * 5-year warranty of all electronics and housing

DIMENSIONS

L: 23.75" in 2ft - 47.24" in 4ft - 94.48" in 8ft
H: 3.46" - W: 4.33"

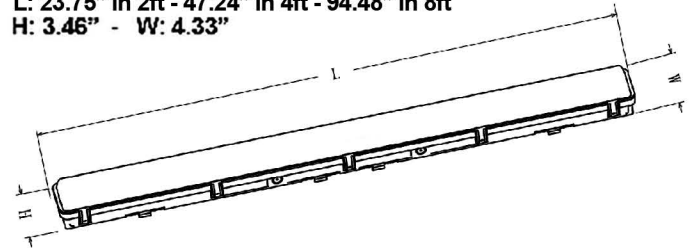


MOUNTING

*Aluminum Surface Mount clips standard. Optional 10-FT Aircraft Cables for hanging available (sold separately)



PHOTOMETRIC DATA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

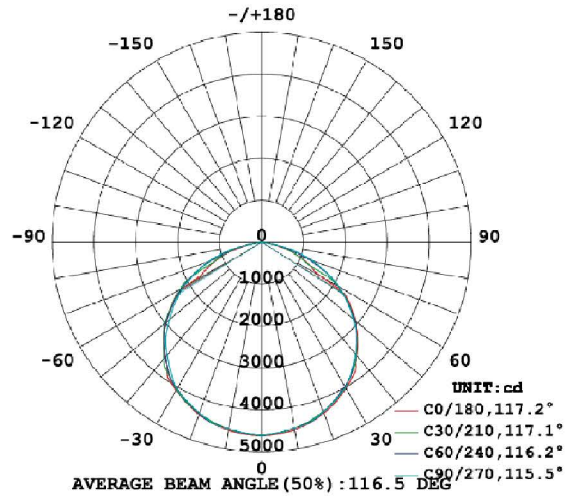

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

