



The TS-TPL3 is a surface-mounted LED light, which are designed to prevent the intrusion of moisture and dust. It provides general ambient lighting in commercial and industrial settings, and is the perfect choice for both new construction and retrofits. This high-efficacy light provides long-life and uniform illumination, as well as standard 0-10vdc dimming capability. Available in 4ft and 8 ft lengths.

FEATURES

- * Fosam Driver,
- * 140 Lu/W
- * 5,600 Lumens in 4Ft, 9,800 Lumens in 8 Ft
- * Color temperature : 5000K
- * Long-life LEDs provide 50,000 hours of operation
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Power factor > 0.95
- * Beam Angle: 120 degrees
- * Color rendering index > 80
- * Waterproof rating: IP 65
- * 0-10V dimming capability

ORDERING INFORMATION


PART #	Length	Color Temp	Lumens	Lumen /watt	Wattage
TS-TPL3-4FT-40W-H-50K	4 FT	5000k	5,600	140	40
TS-TPL3-8FT70W-H-50K	8 FT	5000k	9,800	140	70

WARRANTY & DETAILS

- * ETL listed
- * DLC Premium 5.1 Listed
- * 5-year warranty of all electronics and housing

DIMENSIONS

L: 47.24" in 4 ft - 94.48" in 8 ft
H: 3.46" - W: 4.33"

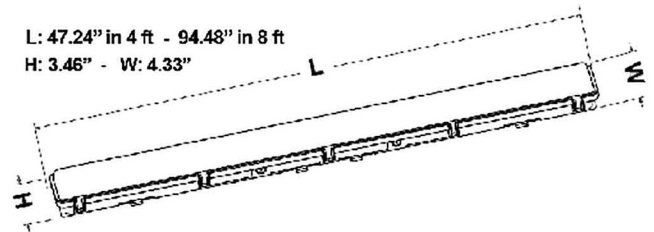


ACCESSORIES


- * BLD-CM20N-8W Emergency back-up

PHOTOMETRIC DATA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

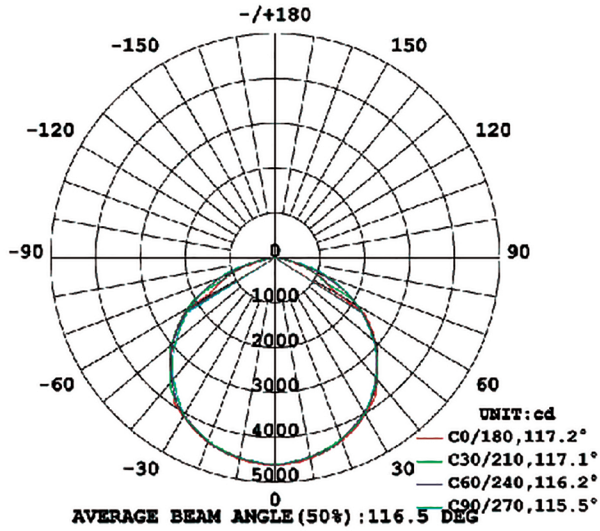

CO PLANE ISOLUX DIAGRAM (UNIT:lx)

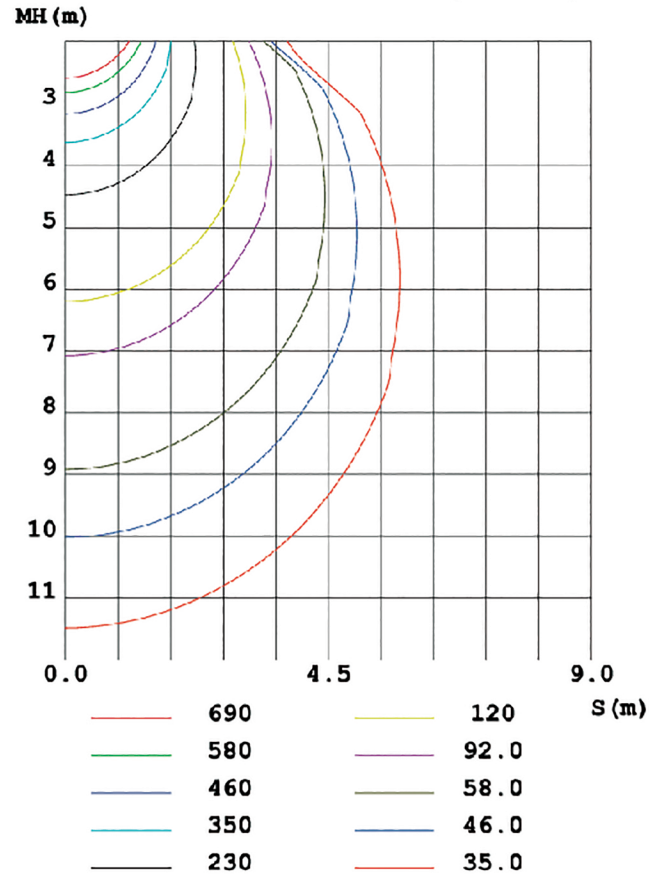

SPECTRUM DATA 40W @ 5000K

