

CENTER BASKET / VOLUMETRIC TROFFER



35K / 4K / 5K kelvin selectable Wattage selectable

These 2' x 2' and 2' x 4' LED Center Basket Volumetric Troffers are designed as a direct replacement for fluorescent fixtures installed in ACT grid or gyp. ceilings. These fixtures are kelvin selectable 35K, 4K and 5K and wattage selectable. It is the perfect choice for both new construction and retrofits. This high-efficacy fixture provides long-life and uniform illumination as well as standard 0-10V dimming capability.

FEATURES

- * Color temperature: 3500K/4000K/5000K selectable.
- * Wattage selectable 2x2: 30/35/40W
- * Wattage selectable 2x4: 30/40/50W
- * 130 Lm per watt
- * Long-life LEDs provide 75,000 hours of operation with at least 70% of initial lumen output (L70).
- * Universal 120-277 AC voltage (50-60Hz) is standard.
- * 0-10 V dimming capability is standard
- * 120 degree beam angle
- * Power factor > 0.90 and CRI > 80
- * Total harmonic distortion < 20%
- * Steel housing and polycarbonate lens
- * Easy installation in new construction or retrofit. Fits in standard grid ceilings
- * Standard earthquake clips provide secure installation
- * Standard recessed mounting in ACT ceilings.

ORDERING INFORMATION


WARRANTY / LISTING

- * ETL listed
- * DLC Premium listed
- * Flicker-free per IEEE1789-2015 (low risk of adverse effects of flicker at 100% light output level)
- * Complies with RoHS requirements
- * 5-year warranty on all electronics and housing

MOUNTING KITS

* Optional Surface Mount Kits available for installation on gyp. board or other hard ceilings

DIMENSIONS

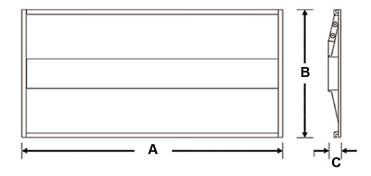

PART#	WATTAGE SELECTABLE	LUMENS	LUMENS /	DIMENSIONS			OPTIONS (ORDER	Emergency driver
			WATT	Α	В	С	SEPARATELY)	Emergency arriver
TTR-22-40-L-HY	30	3900	130	23.74	23.74	1.97	ALS-SMKT-22 = Surface Mounting kit 2x2	BLD-HM08D 8W Emergency driver order separately
	35	4550	130					
	40	5200	130					
DART#	WATTAGE	LUMENS	LUMENS /	DIN	MENSIO	NS	OPTIONS (ORDER	Emergency driver
PART#	WATTAGE SELECTABLE	LUMENS	LUMENS / WATT	DIN A	IENSIO B	NS C	OPTIONS (ORDER SEPARATELY)	Emergency driver
PART# TTR-24-50-L-HY		LUMENS 3900				O. P. ST.	SEPARATELY)	
	SELECTABLE		WATT	Α	В	С		Emergency driver BLD-HM08D 8W Emergency driver order separately











2x2 40W

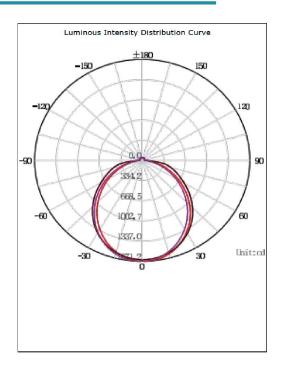

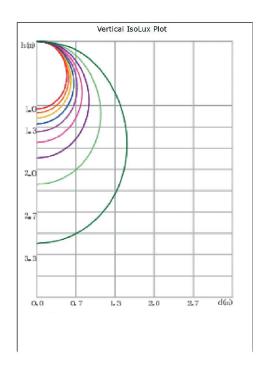

2x4 50W

